SOMANY
TILES | BATH | BUILDING SOLUTIONS

SOMANY CERAMICS LIMITED

Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh. Ph.: 0120-4627900
Registered Office: 2, Red Cross Place, Kolkata-700001. Ph.: 033-22487406/5913
Ahmedabad Office: 601 to 606, 6" Floor, Aalps Euphoria, Opp. Adani CNG Pump,B/S. Gota Flyover, S G Highway, Ahmedabad - 382481. Ph.: 7303597773 & 7303597774

Email ID: customer.care@somanyceramics.com | **Website:** www.somanyceramics.com
Toll Free No.: 1800-103-0004 (Time: 09:30AM to 06:30PM; Monday-Saturday)

Visit us at:
www.somanyceramics.com


Find us at:
www.facebook.com/SomanyCeramic

Find us at:
www.instagram.com/SomanyCeramics

GET IT ON Google Play

Available on the App Store

SOMANY
Ezy Fix

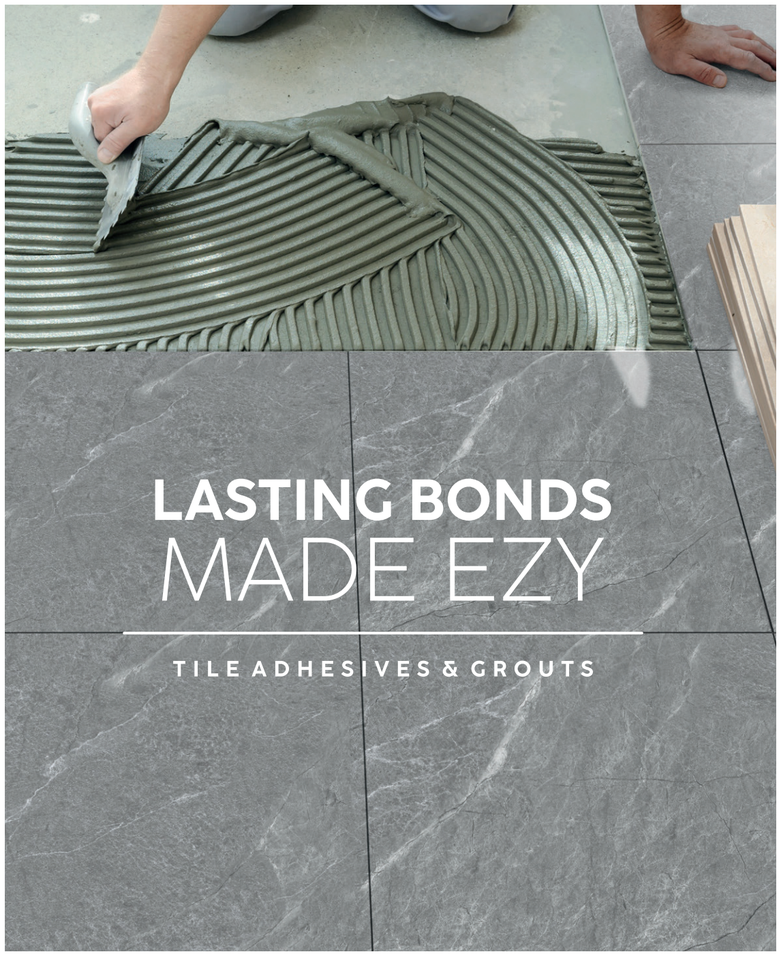

Tile & Stone Installation Solutions

SOMANY Ezy Fix

ADHESIVES & GROUTS

LASTING BONDS
MADE EZY



TILE ADHESIVE | EPOXY GROUT | CEMENT POLYMER GROUT | PU ADHESIVE | GROUT ADMIX | TILE CLEANER

SEF 333/SEF 333 WHITE

TILE ADHESIVE

EN 12004: C1T | IS 15477: 2019: Type 1

It is suitable for fixing all types of ceramic tiles on interior floors and walls, as well as small-sized vitrified floor tiles.

Features
- Ready to Use: Just add water—no additional additives required.
- Strong Adhesion: Excellent bonding strength with low shrinkage.
- Durable Performance: Maintains adhesion even in submerged conditions and under high temperatures
- Flexible: Accommodates physical and thermal movements without cracking.
- Fast-Setting: Floors are ready for use within 24 hours, reducing downtime.



PACKAGING UNITS
20 kg | 40 kg

COLOUR
Grey I White

COVERAGE
5 to 5.5 m²/20 kg bag at 3 mm bed thickness

SEF 444/SEF 444 WHITE

TILE & STONE ADHESIVE

EN 12004: C2T | IS 15477: 2019: Type 2

It is suitable for fixing all types of ceramic and vitrified tiles on interior walls and floors. It offers excellent adhesion for tile-on-tile applications.

Features
- Performance Adhesion: Superior bond strength ideal for fixing a wide range of tiles and stones, including ceramic, vitrified, porcelain, glass mosaic, marble, granite, and natural stones
- Compatible Substrates: Can be applied over concrete, plaster, cement screed, blockwork, rendered surfaces, and waterproofing membranes
- Deformable and Shock-Resistant: Withstands thermal expansion, vibrations, and structural movements without cracking or debonding
- Time-Efficient: Allows light foot traffic and grouting after 24 hours, reducing project completion time



PACKAGING UNITS
20 kg | 40 kg

COLOUR
Grey I White

COVERAGE
5 to 5.5 m²/20 kg bag at 3 mm bed thickness

SEF 666/SEF 666 WHITE

TOUGH BOND TILE & STONE ADHESIVE

EN 12004: C2TE | IS 15477: 2019: Type 2

Specially designed for interior and exterior wall installations involving large-sized ceramic, vitrified, semi-vitreous tiles, marble, granite, and natural stone.
Ideal for wall mounting and tile fixing applications across all types of ceramic, vitrified, and porcelain tiles.

Features
- High Bond Strength (C2 Rated): Strong adhesion for ceramic, vitrified, porcelain, marble, granite, glass mosaic & natural stones.
- Ideal for Large & Heavy Tiles: Supports slabs up to 1200x1800 mm with minimal slippage.
- Extended Open Time (E Rated): 30-minute open time for hot climates and large areas.
- Indoor & Outdoor Use: Suitable for floors & walls in both internal and external settings.
- Vertical Application Ready: Can be applied up to 3 meters high - great for cladding & façades.



PACKAGING UNITS
20 kg | 40 kg

COLOUR
Grey I White

COVERAGE
5 to 5.5 m²/20 kg bag at 3 mm bed thickness

SEF 666PLUS/SEF 666PLUS WHITE

NEW

EN 12004: C2TE | IS 15477: 2019: Type 3

TOUGH BOND TILE & STONE ADHESIVE

Somany Ezy Fix SEF-666 PLUS is a high-performance, polymer-modified cement-based tile adhesive with extended open time. Suitable for ceramic, vitrified, and natural stone tiles on vertical and horizontal surfaces, it performs well even on demanding substrates and in wet areas like pools and saunas.

Features

- High Bond Strength (C2 Rated): Strong adhesion for ceramic, vitrified, porcelain, marble, granite, glass mosaic & natural stones.
- Ideal for Large & Heavy Tiles: Supports slabs up to 1200x1800 mm with minimal slippage.
- Extended Open Time (E Rated): 30-minute open time for hot climates and large areas.
- Indoor & Outdoor Use: Suitable for floors & walls in both internal and external settings.
- Vertical Application Ready: Can be applied up to 3 meters high—great for cladding & façades.



PACKAGING UNITS
20 kg | 40 kg

COLOUR
Grey I White

COVERAGE
5 to 5.5 m²/20 kg bag @ 3 mm bed thickness

SEF 777/SEF 777 WHITE

EN 12004: C2TES1 | IS 15477: 2019: Type 3 Ts1

ELEVATION TILE & STONE ADHESIVE

Specifically designed for exterior wall & installations of large size ceramic tiles, vitrified tiles, semi vitreous tiles, interior wall/floor surfaces, marble, granite & natural stone etc.
It offers high strength, ease of use, water and shock resistance, making it suitable for both dry and wet areas, including swimming pools and washrooms.

Features

- Strong & Flexible Bond (C2TES1): High adhesion for large tiles, including low-porosity and moisture-sensitive stones.
- Perfect for Vertical Elevations: Non-slip formula supports up to 6m height-ideal for façades and cladding.
- Extended Open Time (E Rated): 30-minute open time offers flexibility in hot climates and large areas.
- Thermal & Structural Movement Ready (S1 Rated): Suitable for balconies, terraces, heated floors, and exteriors.



PACKAGING UNITS
20 kg | 40 kg

COLOUR
Grey I White

COVERAGE
5 to 5.5 m²/20 kg bag at 3 mm bed thickness

SEF 888/SEF 888 WHITE

EN 12004: C2TES1 | IS 15477: 2019: Type 4 Ts1

LIMITLESS TILE & STONE ADHESIVE

Somany Ezy Fix SEF 888 Adhesive is blended highly polymer fortified, cement-based adhesive that provides enhanced adhesion and slip resistance properties, increased flexibility and excellent bond strength, which is necessary for fixing large format tiles and stones especially in external conditions and on substrates subject to deformations/ vibrations.
Reliable adhesion for swimming pools, fountains, and submerged surfaces

Features

- Limitless Application Scope: Designed for extreme conditions-suitable across residential, commercial, and industrial projects.
- Performs in High-Heat Zones: Formulated to withstand elevated temperatures in kitchens and outdoor sun-exposed areas.
- Heavy-Duty for Low-Porosity Slabs: Ensures strong grip on moisture-sensitive and ultra-low absorption surfaces.
- Engineered for High-Vibration Areas: Excels in dynamic environments like gyms, railways, and airports.



PACKAGING UNITS
20 kg | 40 kg

COLOUR
Grey I White

COVERAGE
5 to 5.5 m²/20 kg bag at 3 mm bed thickness

SEF 888 GRANDE/SEF 888 GRANDE WHITE

NEW

EN 12004: C2TES2 | IS 15477: 2019: Type 4

LIMITLESS TILE & STONE ADHESIVE

Somany Ezy Fix SEF-888 Grande Adhesive is a highly polymer-fortified, ultra-flexible, cement-based adhesive with strong slip resistance and superior bond strength. Ideal for extra-large tiles and stones on substrates prone to movement or vibration.
Designed for extreme conditions—suitable across residential, commercial, and industrial projects.

Features

- Performs in High-Heat Zones: Formulated to withstand elevated temperatures in kitchens and outdoor sun-exposed areas.
- Ideal for Water Features: Reliable adhesion for swimming pools, fountains, and submerged surfaces.
- Heavy-Duty for Low-Porosity Slabs: Ensures strong grip on moisture-sensitive and ultra-low absorption surfaces.
- Engineered for High-Vibration Areas: Excels in dynamic environments like gyms, railways, and airports.



PACKAGING UNITS
20 kg | 40 kg

COLOUR
Grey I White

COVERAGE
5 to 5.5 m²/20 kg bag @ 3 mm bed thickness

PU ADHESIVE

EN 12004: R2T, IS 15477:2019 TYPE 5

ALL PURPOSE TILE & STONE ADHESIVE

Suitable for bonding a wide range of materials including tiles, stones, Wood, Gypsum Board, Fiber Cement Boards, Metal, Rubber, Glass and other construction materials. Ideal for both interior and exterior applications.
Perfect for areas with high moisture and thermal variations. Excellent for use in commercial and residential projects. Suitable for swimming pools and water features. Specifically formulated for harsh environments like industrial kitchens, spas, and chemical zones.

Features

- Reactive Polyurethane Chemistry (R2 Rated): Two-component resin system ensures permanent bonding through chemical curing, unlike cement-based adhesives.
- Elastic & Impact Absorbing: Offers shock resistance and flexibility—suitable for high-vibration zones and structural deflection areas.
- Zero Slip for Overhead Applications: Thixotropic nature allows installation on ceilings and overhead surfaces with zero sag.



PACKAGING UNITS
4 kg | 8 kg

COVERAGE
1.5 to 2.5 m² per kg for a 3-4 mm layer (depending on the trowel size and substrate conditions).

EPOXY (3-COMPONENT, DUO & GLITTER) GROUT

For interior/exterior residential & commercial floor/wall surface or under water areas such as bathrooms & swimming pools due to its non-porous, waterproof nature. Ezy Fix Epoxy Grouts are Stain Proof, UV-Stable, High abrasion resistance & completely Chemical resistant. Withstands exposure to acids, solvents, and high temperatures, making it suitable for laboratories, kitchens, and high traffic areas.

Features

- Durable & Stain-Resistant: Provides excellent resistance to stains, discoloration, and harsh chemicals, making it perfect for high-traffic and industrial areas.
- Non-Shrinking & Non-Cracking: Maintains joint integrity without shrinking or cracking, ensuring long-lasting results.
- Easy to Clean & Maintain: Smooth, non-porous surface prevents dirt, mold, and mildew buildup, simplifying upkeep.
- Superior Bond Strength: Strong adhesion to tiles and substrates for a durable, long-lasting finish.



PACKAGING UNITS
1 kg | 5 kg

COVERAGE
1 kg of epoxy grout generally covers 0.3 to 0.5 m² for a 3 mm joint width with standard 6 mm depth.

SOMANY Ezy Fix

Adhesives & Grouts

CEMENT POLYMER GROUT

For grouting interior/exterior residential and commercial wall & floor surfaces in dry or wet conditions.
Recommended to use with Admixture of 400ml bottle.

Features
- Enhanced Durability: Provides strong resistance to cracking, shrinkage, and wear over time.
- Water-Resistant: Ideal for wet areas like bathrooms, kitchens, and swimming pools.
- Flexible: Accommodates slight movements in substrates, reducing the risk of cracking.
- Easy to Apply: Smooth consistency for easy application and excellent workability.
- Wide Range of Colours: Available in various shades to complement different tile finishes.



PACKAGING UNITS
1 kg | 10 kg

COVERAGE
1 kg of cement polymer grout typically covers around 0.6 to 1.0 m² for 3 mm joint width with standard 6 mm grout depth.

ADMIXTURE

ADVANTAGE
- Improves the flexibility of cement polymer grout.
- Improves the strength.
- Water resistance.
- Easy to Clean.
- Resistance to mild acids.
- High Performance Tile Joint.
- Filler Admixture.

PACK SIZE
400ml



EXTRA STRONG MARBLE CLEANER

REMOVES STAINS KILLS GERMS
Preserves and maintains tile print/colour

ADVANTAGE
- Suitable for ceramic tiles, vitrified tiles, granite, and sanitaryware.
- For wall and floor surfaces.
- Suitable for interior & exterior use.
- Keep out of the reach of children.

PACK SIZE
1 Ltr



T-LEVELLER

ADVANTAGE
- Perfect levelling of tiles during installation.
- Eliminates uneven edges.
- Reduces manual corrections.
- Ensures even gaps and prevents tiles from shifting.
- Creates a clean, professional finish.



T-SPACER

ADVANTAGE
Tile spacers make tiling easier and more precise. They ensure even gaps, prevent tiles from shifting, and create a clean, professional finish.



Note